



MEDIUM PRESSURE BLOWERS

RD

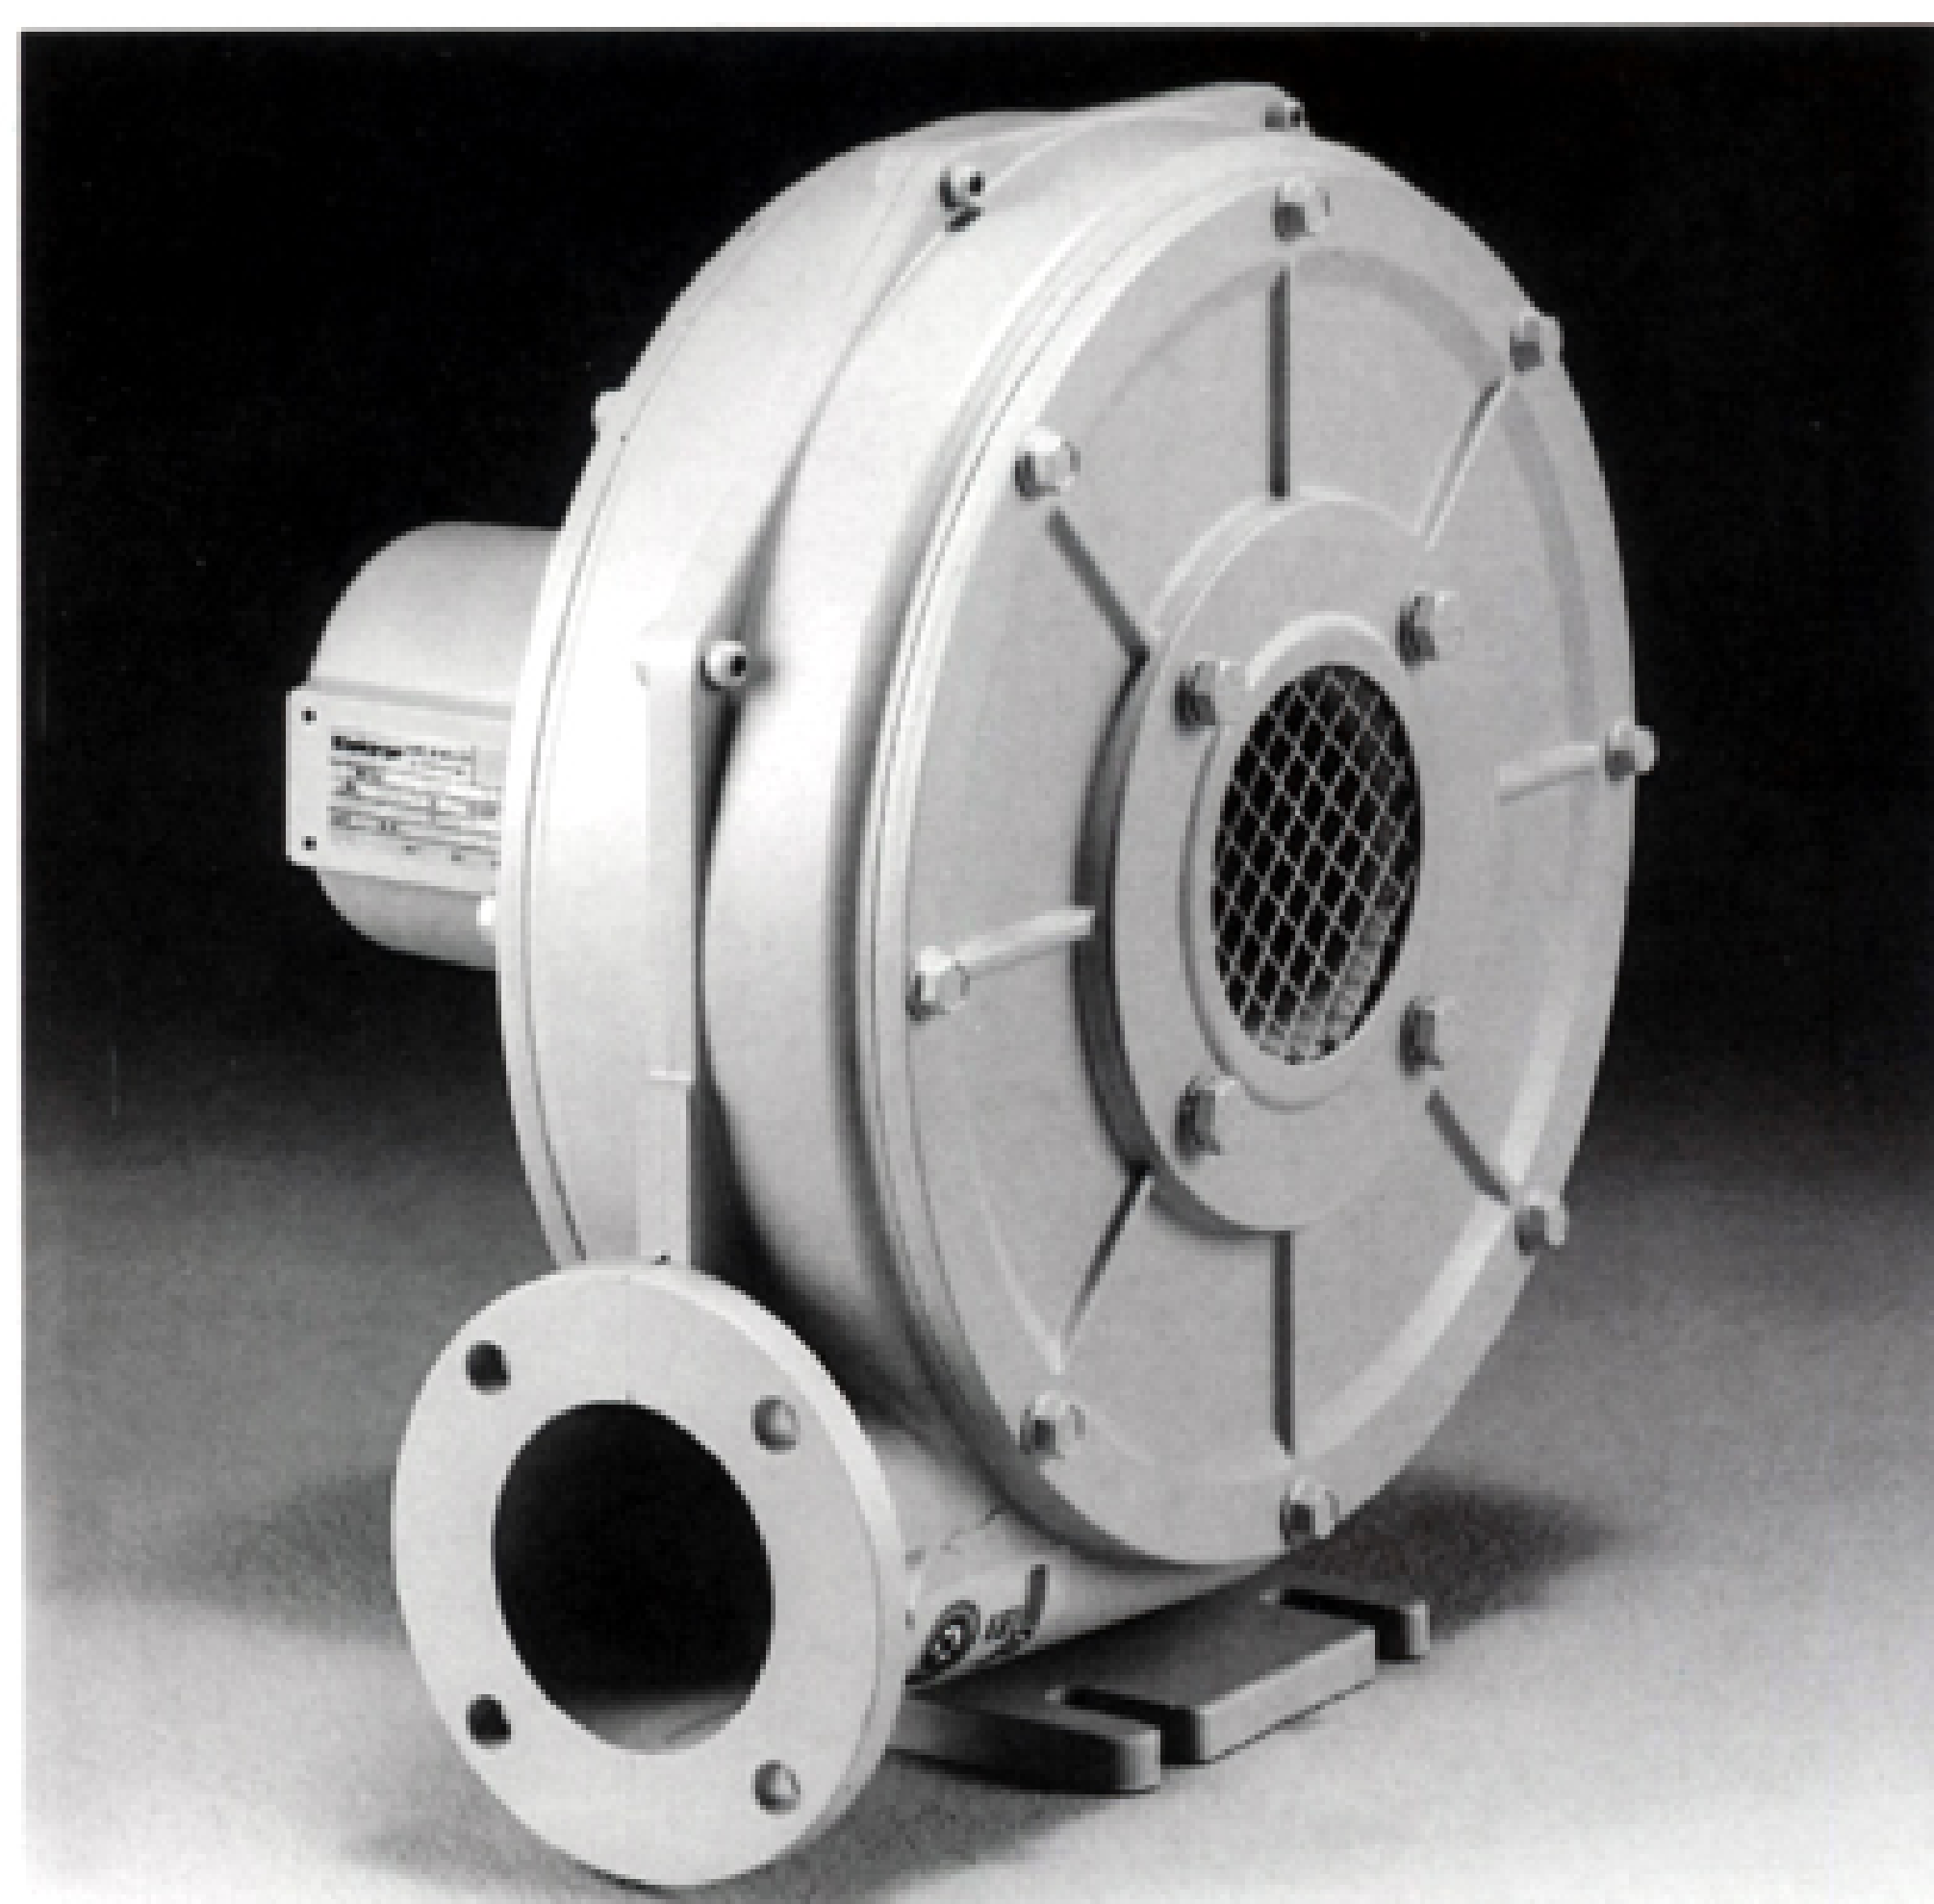

RD range

Cast aluminium blower housings, impellers made of galvanised steel sheet, maintenance-free squirrel cage rotor motor to IP 54. The blowers can be supplied in clockwise or anti-clockwise rotation, with or without foot base. On demand speed variable execution, 2-step speed variable, stepless with single phase, or speed variable execution by frequency converter. A variety of accessories include fine filters, connectors and throttle valves, etc. Special blowers for specific applications, e.g. for higher media flow and ambient temperatures, with improved corrosion protection, with sealed housing parts, for special voltage and frequency as well as to enclosure IP 55 and thermal class F.

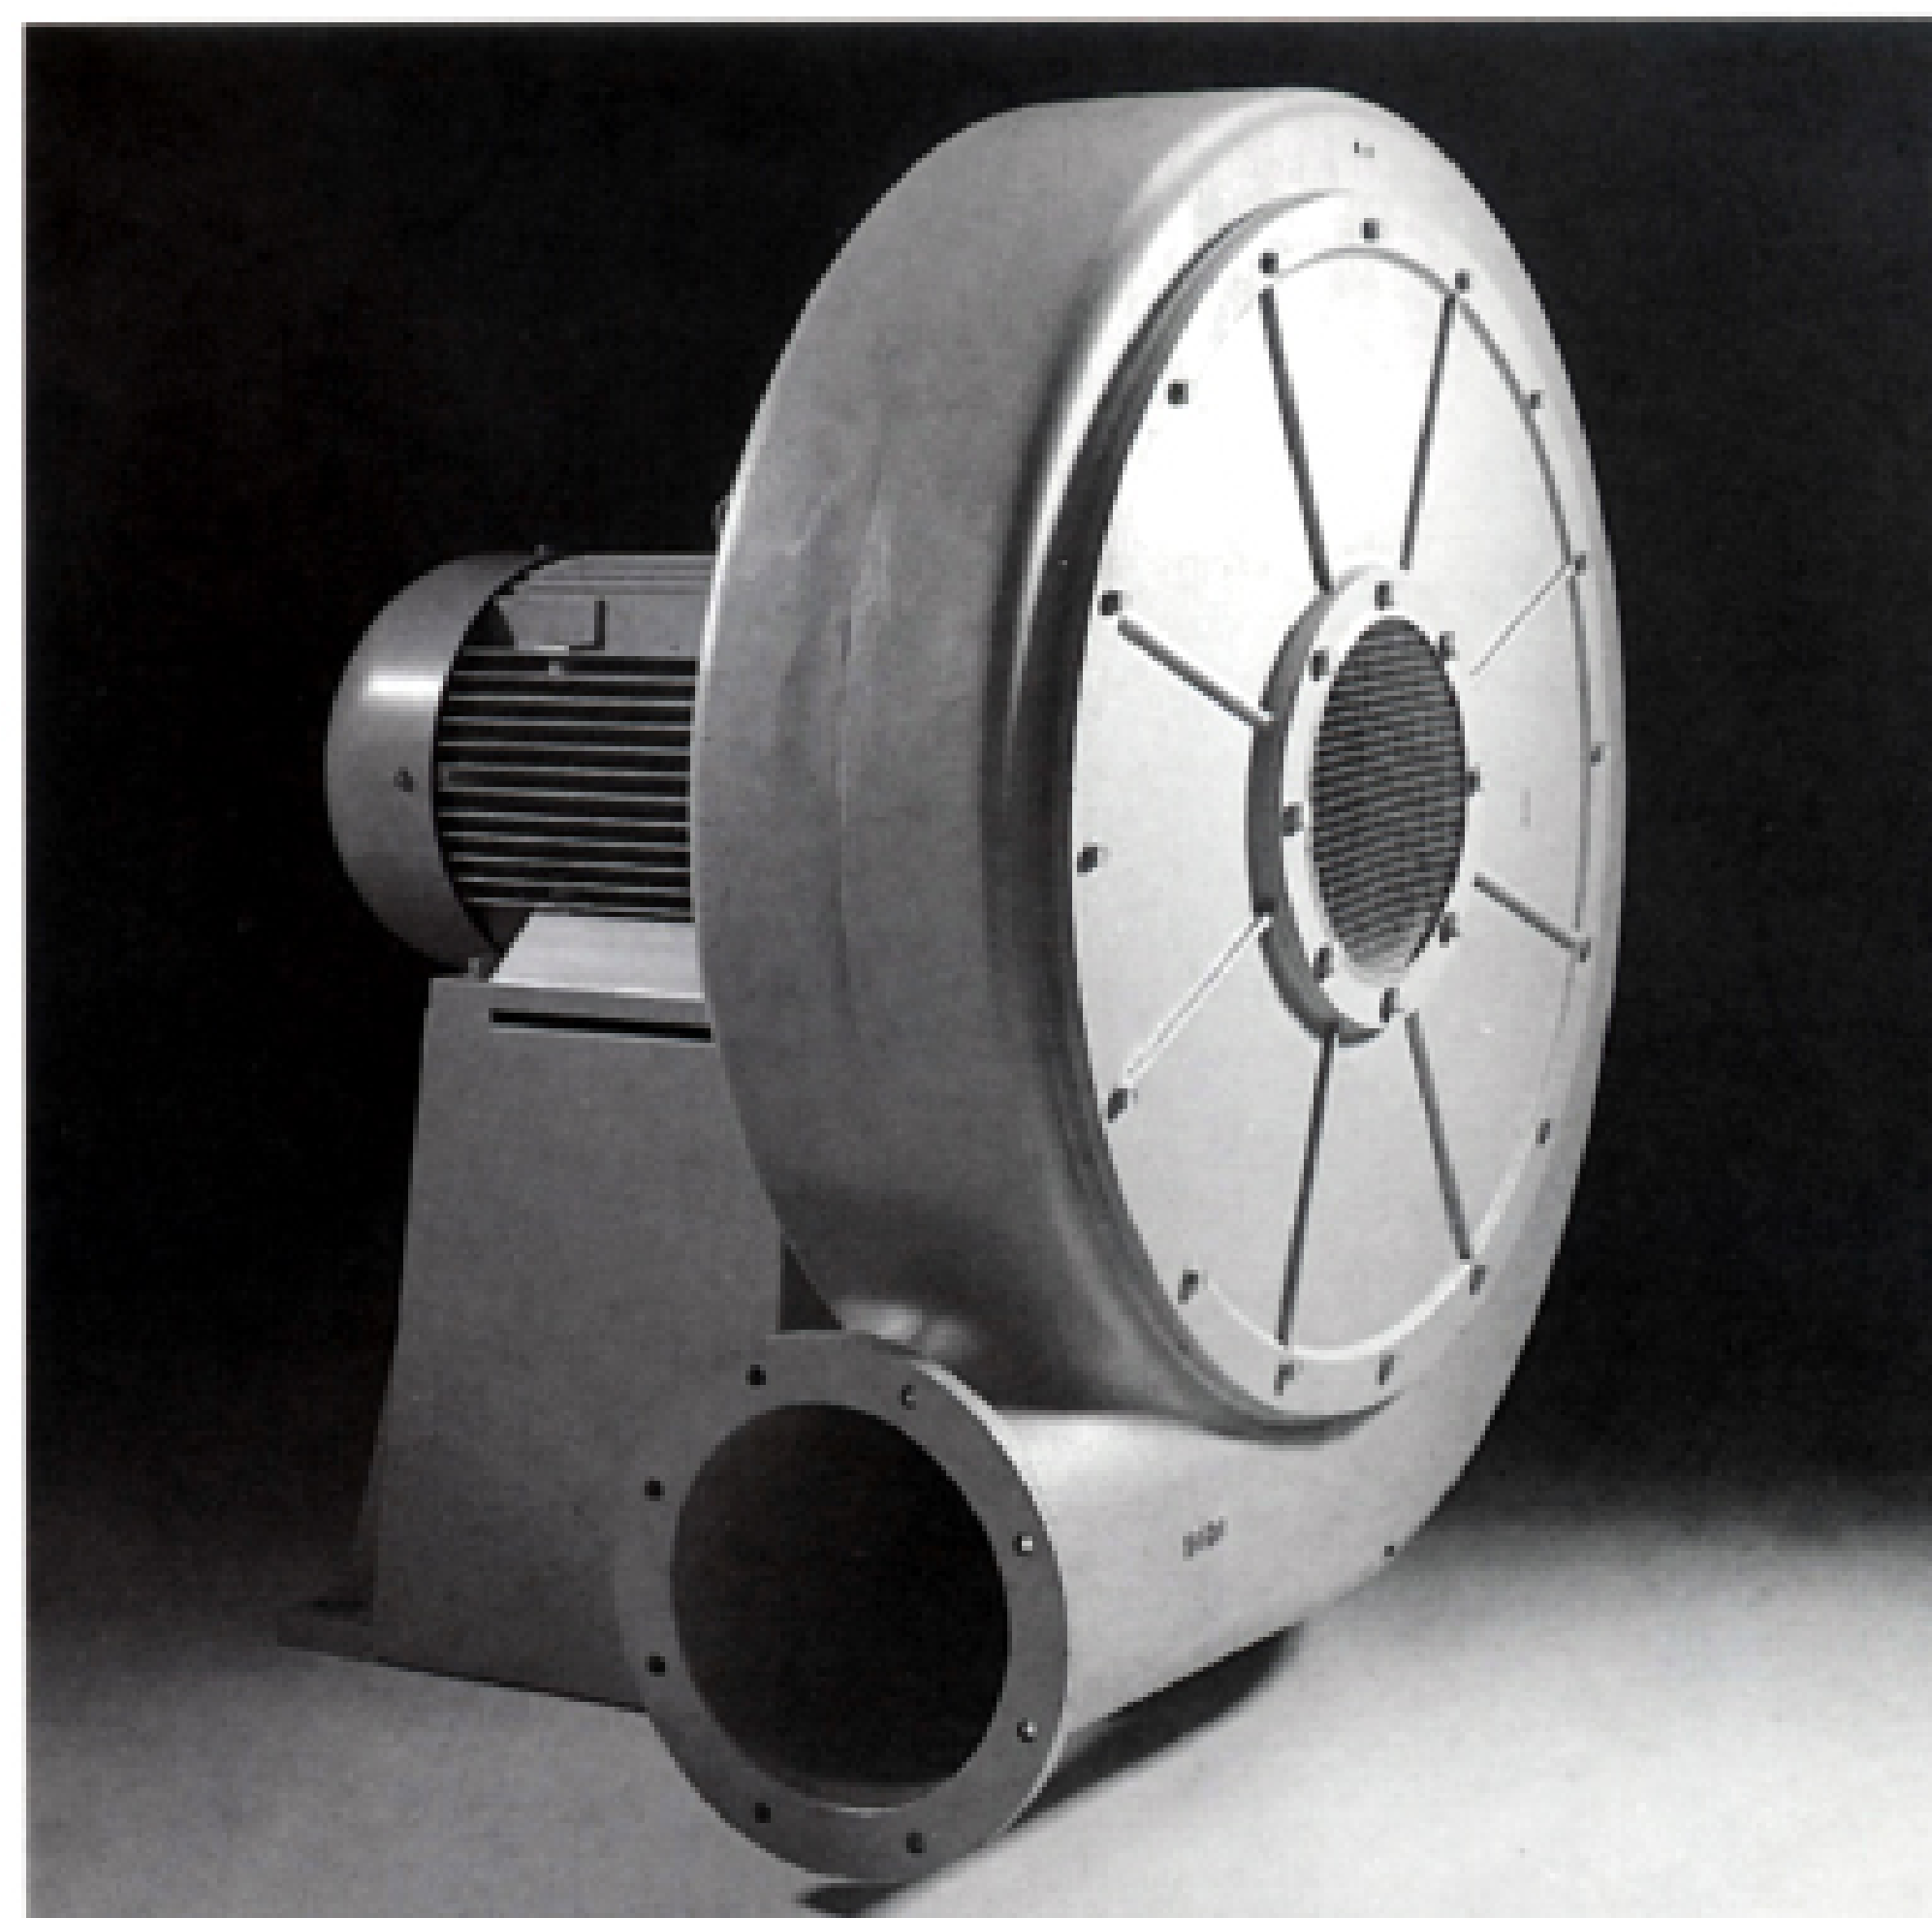

Applications:

- Conveying of medium air volumes at higher system resistance
- Ventilation of installations with higher system resistance
- Air supply for drying installations
- Air supply for air cushion tables
- Air supply for filters and dust extraction

For more details see RD catalogue.

