
CONVEYING BLOWERS

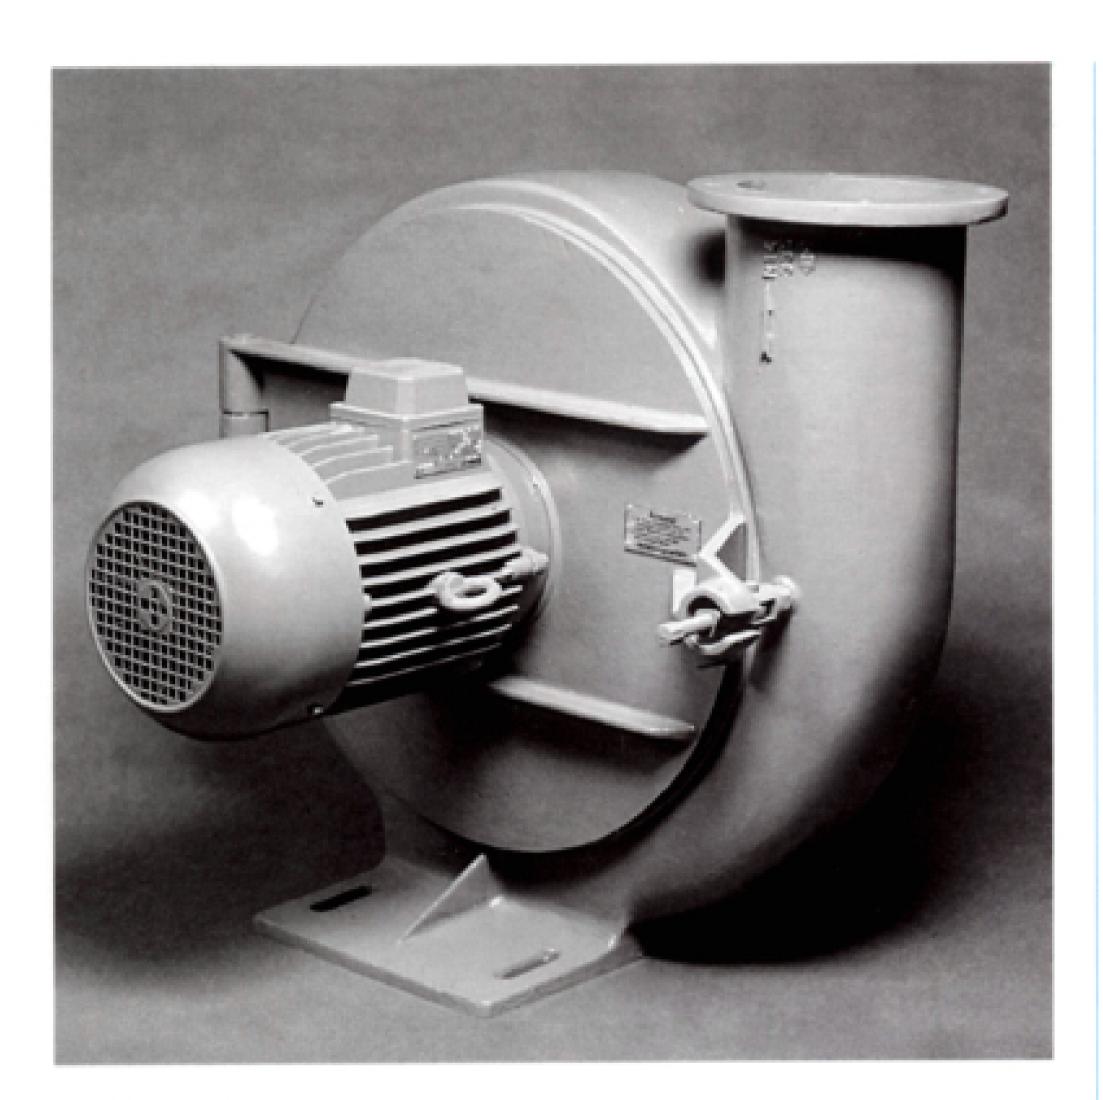

FD range

Blower housings made of abrasion resistant cast iron, hinged housing cover lid for inspection and cleaning, welded sheet steel impellers with radial blades.

Maintenance-free squirrel cage rotor motors to IP54.


The units can only be supplied in the housing position pictured. Accessories: Various connectors for both inlet and outlet side.


Application:

4 7

 Conveying of plastic granules, plastic waste and lightweight bulk materials of all kind provided there is no operational risk.

For more details see FD catalogue.

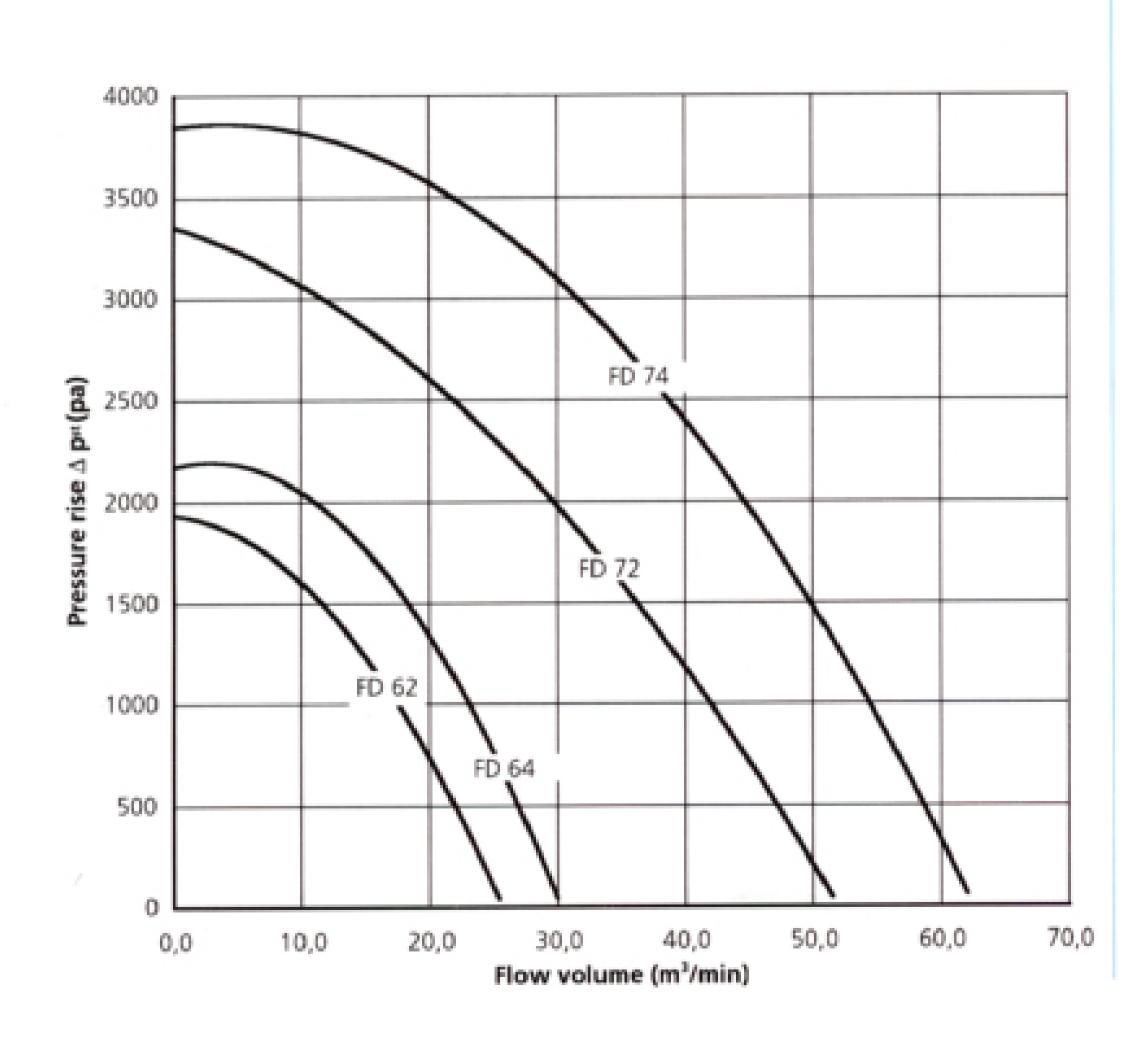

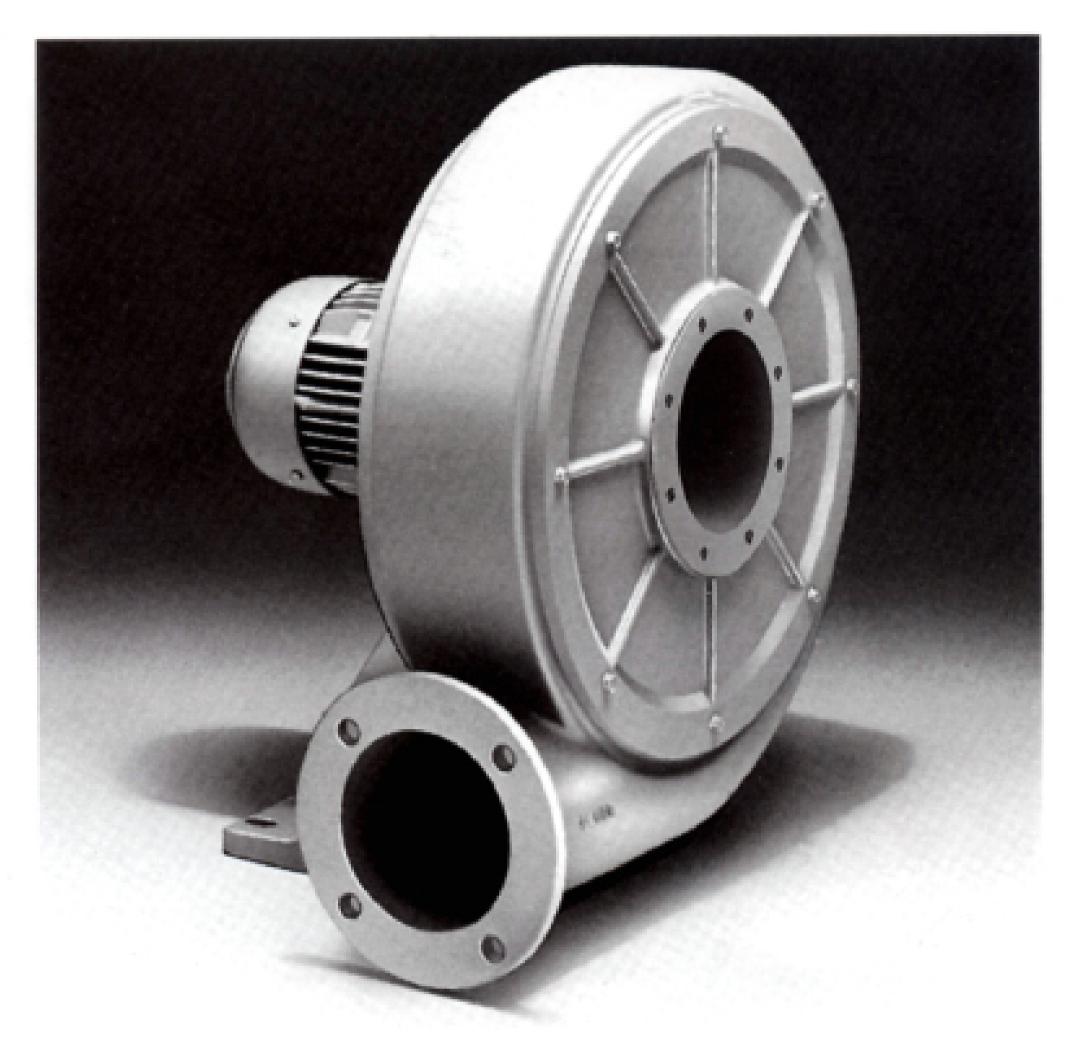

RD F range

The RD F range can be used for conveying of light and non-abrasive bulk. The blower parts are made of aluminium cast, the impellers are made of welded sheet steel. The solid construction of the practically maintenance free medium pressure blowers is the basis for a long lasting service life and low operation cost. Inspection and cleaning may only be carried out at these blowers by unscrewing the housing cover plate.

All drive motors are made to IP 54 enclosure, class B thermal insulation and comply with EN 60034-1 (VDE 530 Part 1). The motor power is oversized in order to have sufficient reserve for the conveying.

Application:

 Conveying of lightweight bulk material of all kind provided there is no operational risk.
 For more details see FD / RD F catalogue

